



Representative Manufacturer Of High-end Depositor In China

2025

HOMEYO

Standard and customization expert of high-end depositing equipment

Frozen cake/Mousse cake special edition

Investment frozen to fresh, seize the key opportunity




SMEs&High-tech enterprise


GUANGZHOU HAOSHENG HONGYU MACHINERY CO., LTD.

GUANGDONG HONGSHENG MACHINERY EQUIPMENT CO., LTD


Multi-layer birthday cake production line

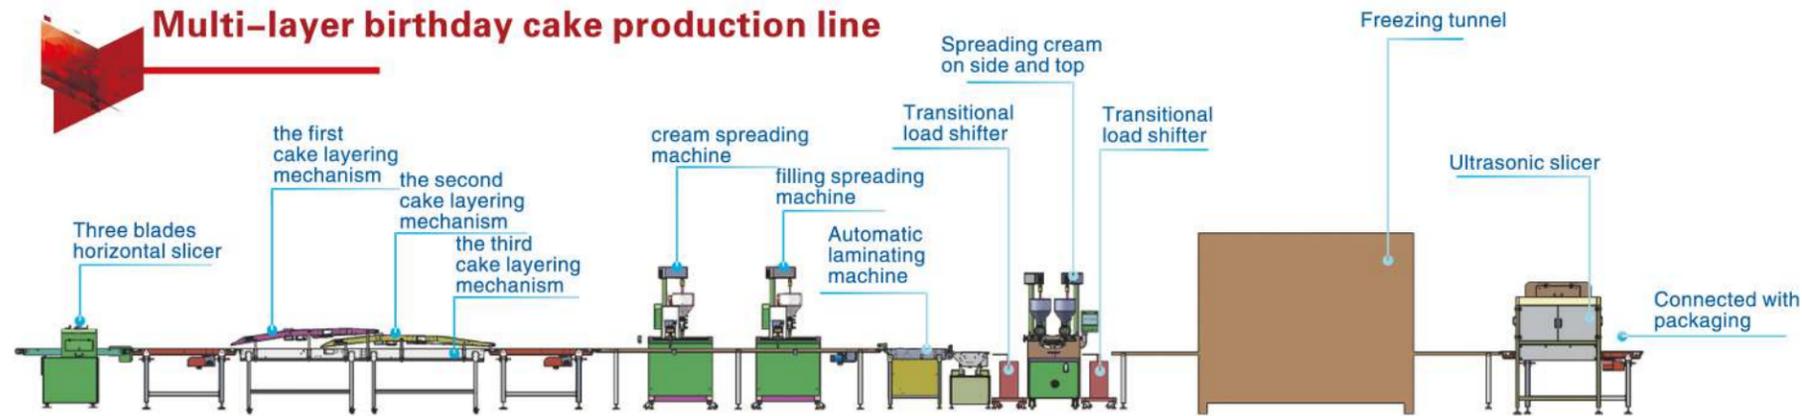

Round/square/cup mousse cake production line(used in common)

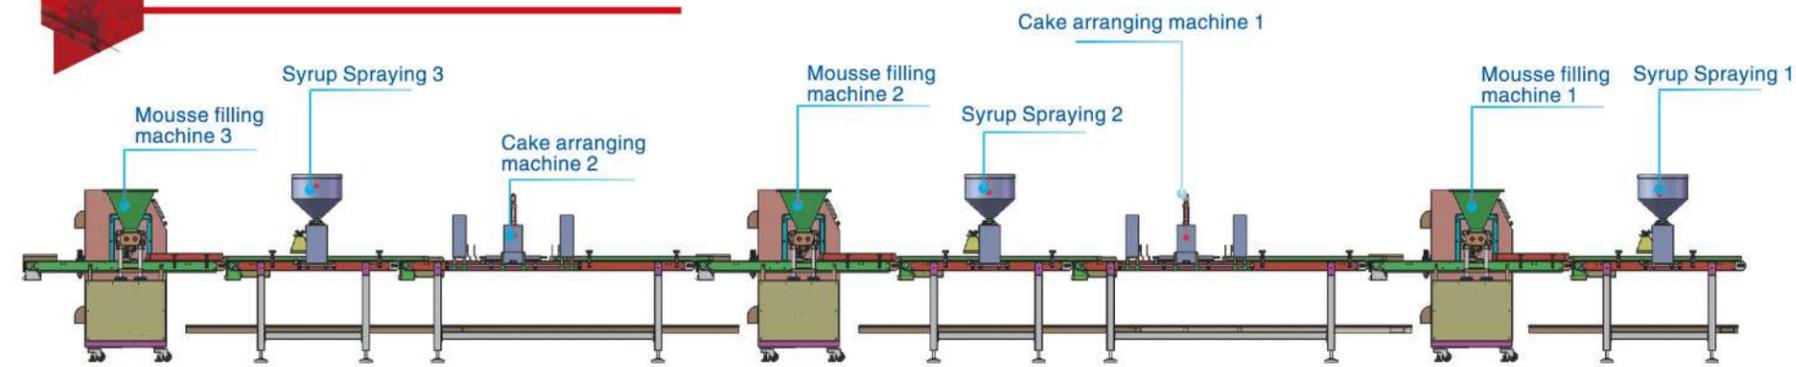

Round(square) mousse cake production line

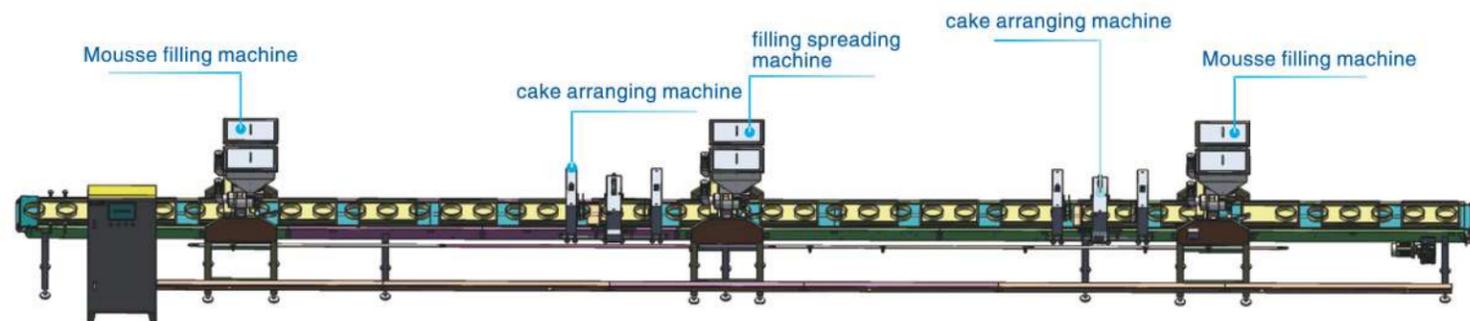

Multi-layer crepe ironing machine HY-305

Performance characteristics

- ★ Suitable for making 4 inches , 6inches , 8inches , 9inches thousand layer egg crepe, other sizes can be customized. (However, each ironing machine can only have one size, it has been determined that it is not convenient to change.)
- ★ The equipment consists of egg crepe feeding system, egg crepe drum system, temperature control system, egg crepe cooling system, egg crepe conveying device; the machine roller material can choose :304 stainless steel and copper;
- ★ The equipment is made of 304 stainless steel, beautiful and compact, using advanced word-type temperature control system, automatic setting of shutdown time, high degree of automation.



Multi lines crepe ironing machine

Performance characteristics

- ★ This machine is suitable for ironing all kinds of white crepe, yellow crepe, tiger skin pattern crepe.
- ★ The machine is multi-lines setting, optional 2 lines, 3 lines, 4 lines, each size and specification is customized, each machine corresponds to one size.
- ★ The machine can be connected with automatic thousand-layer cake production line to produce, also can single machine to make egg crepe.
- ★ The machine can choose to use copper roller and 304 stainless steel roller.
- ★ This machine is simple in design, easy to operate and clean, select high quality materials ,food material contacting parts are made of food grade materials.



Name	Model	Voltage (V)	Power (KW)	Weight (KG)	Size(mm)	Capacity
Multi-layer crepe ironing machine	HY-305	380	6	150	2000*800*1300	450-900pcs/min
Multi lines crepe ironing machine	HY-308 (8inches)	380	28	960	4200*1250*1450	1800-2200pcs/min
Multi lines crepe ironing machine	HY-406 (6 inches)	380	28	960	4200*1250*1450	3200-4000pcs/min

Name	Model	Voltage (V)	Power (KW)	Weight (KG)	Size mm	Capacity
Thousand layer Cake spreading machine	HY-303B	220	2	300	1500*750*1650	10-15 layers/min



Thousand layer Cake spreading machine HY-303B

Performance characteristics

- ★ Suitable for thousand layer cake with two kinds of filling slurry, such as durian and cream;
- ★ Includes 1 cream spreading mechanism, 1 filling spreading mechanism, 1 set of rotary mechanism, 1 set of rotary positioning mechanism and 1 set of control system.
- ★ Function: It has two operation modes: automatic and manual control. Automatic mode is the machine at the set beat time, only need to manually place the egg crepe .Manual mode means that after each beat action is completed, the next production beat can only be carried out after manual press confirmation.




Thousand layer Cake spreading machine HY-303B

Performance characteristics

- ★ Suitable for spreading filling slurry and cream of durian thousand layer cake.
- ★ The number of layers and filling layers can be set freely.
- ★ Optional 2 groups of auxiliary feeding mechanism, suitable for more viscous and light weight cream.
- ★ It is convenient to clean, disassembly and installation for the machine , fast replacement of products.
- ★ This machine includes debugging function, automatic function and manual function ,which adapts to various production environment.




Fully automatic single line Thousand layer Cake production line

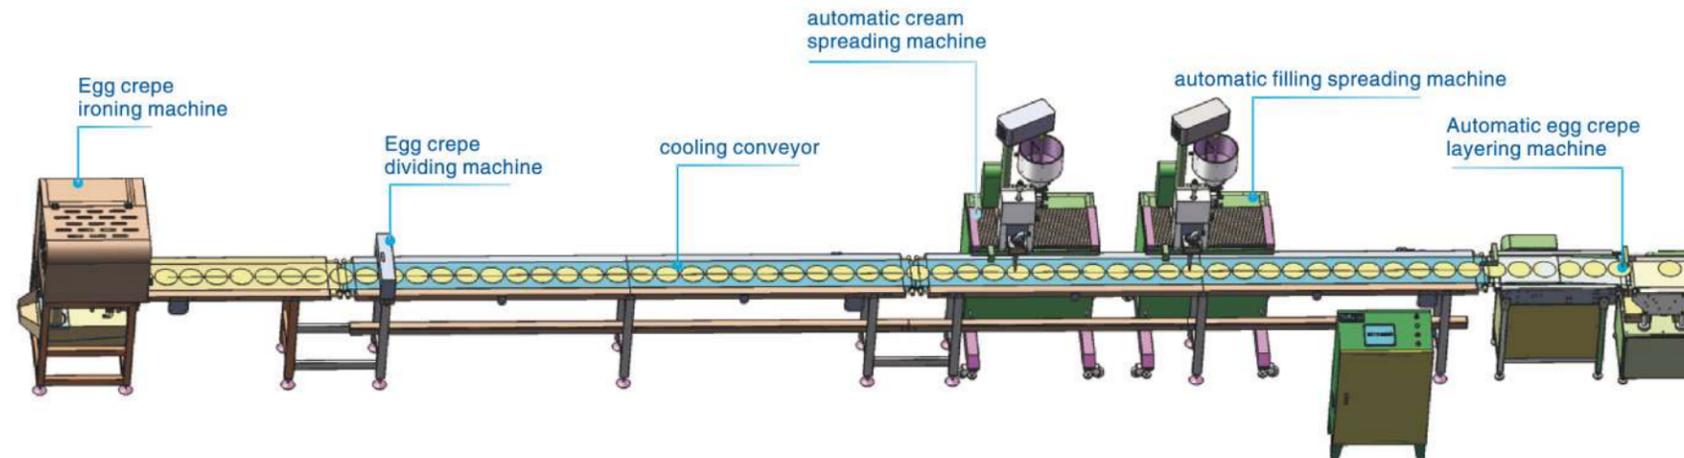

Capacity: 40-120 product/hour




Fully automatic four lines Thousand layer Cake production line

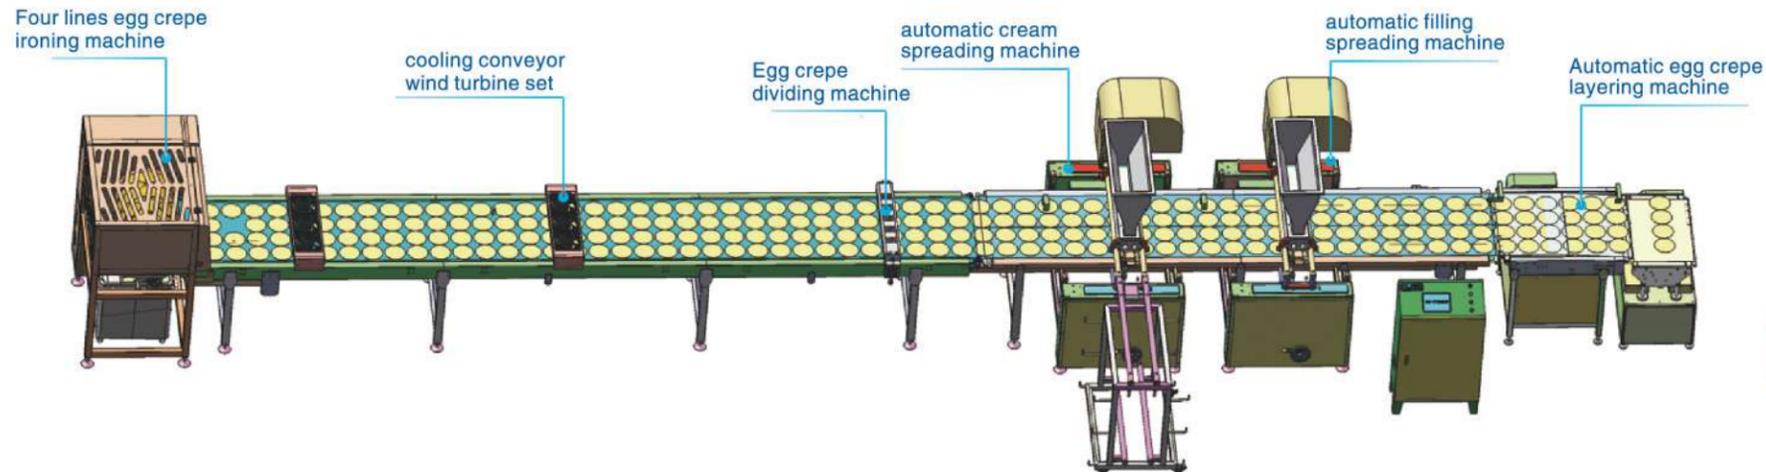


Capacity: 160-480 product/hour



Thousand layer Cake production line for producing 15000 pcs of cakes(8 hours)

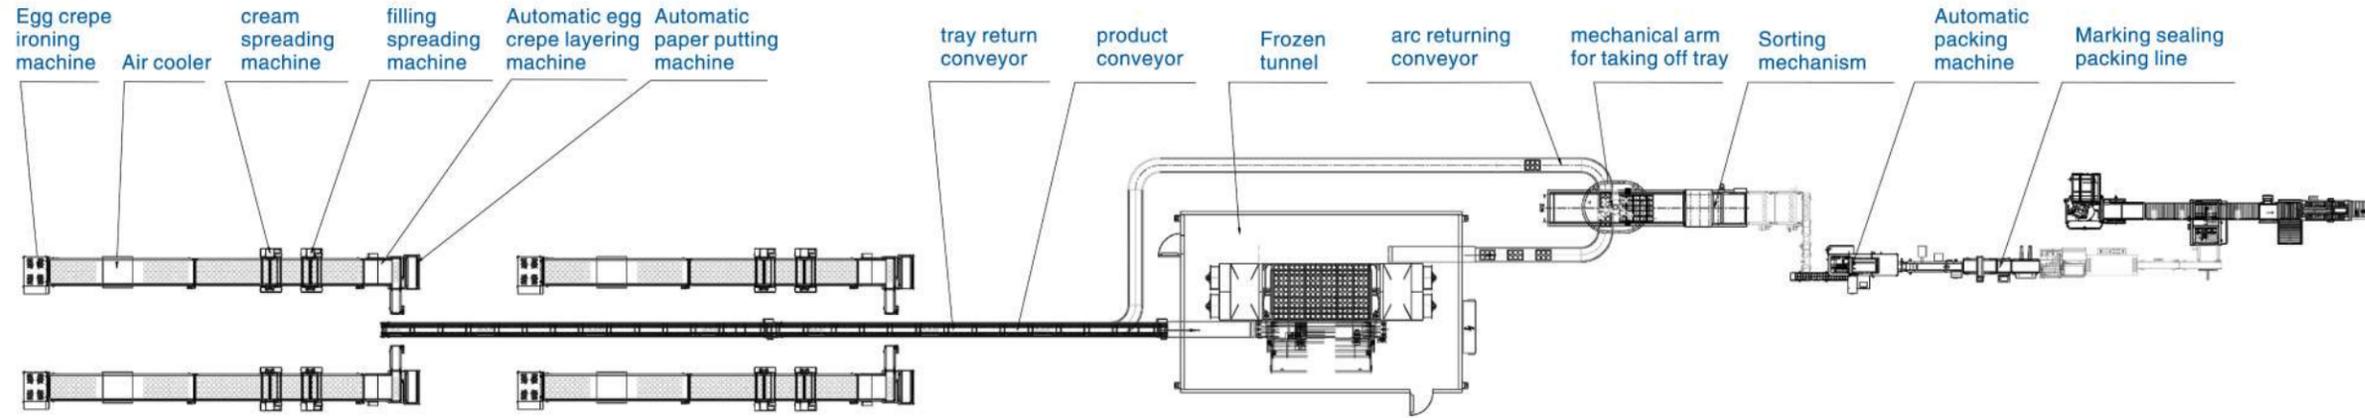

Thousand layer Cake production line for producing 30000 pcs of cakes(8 hours)

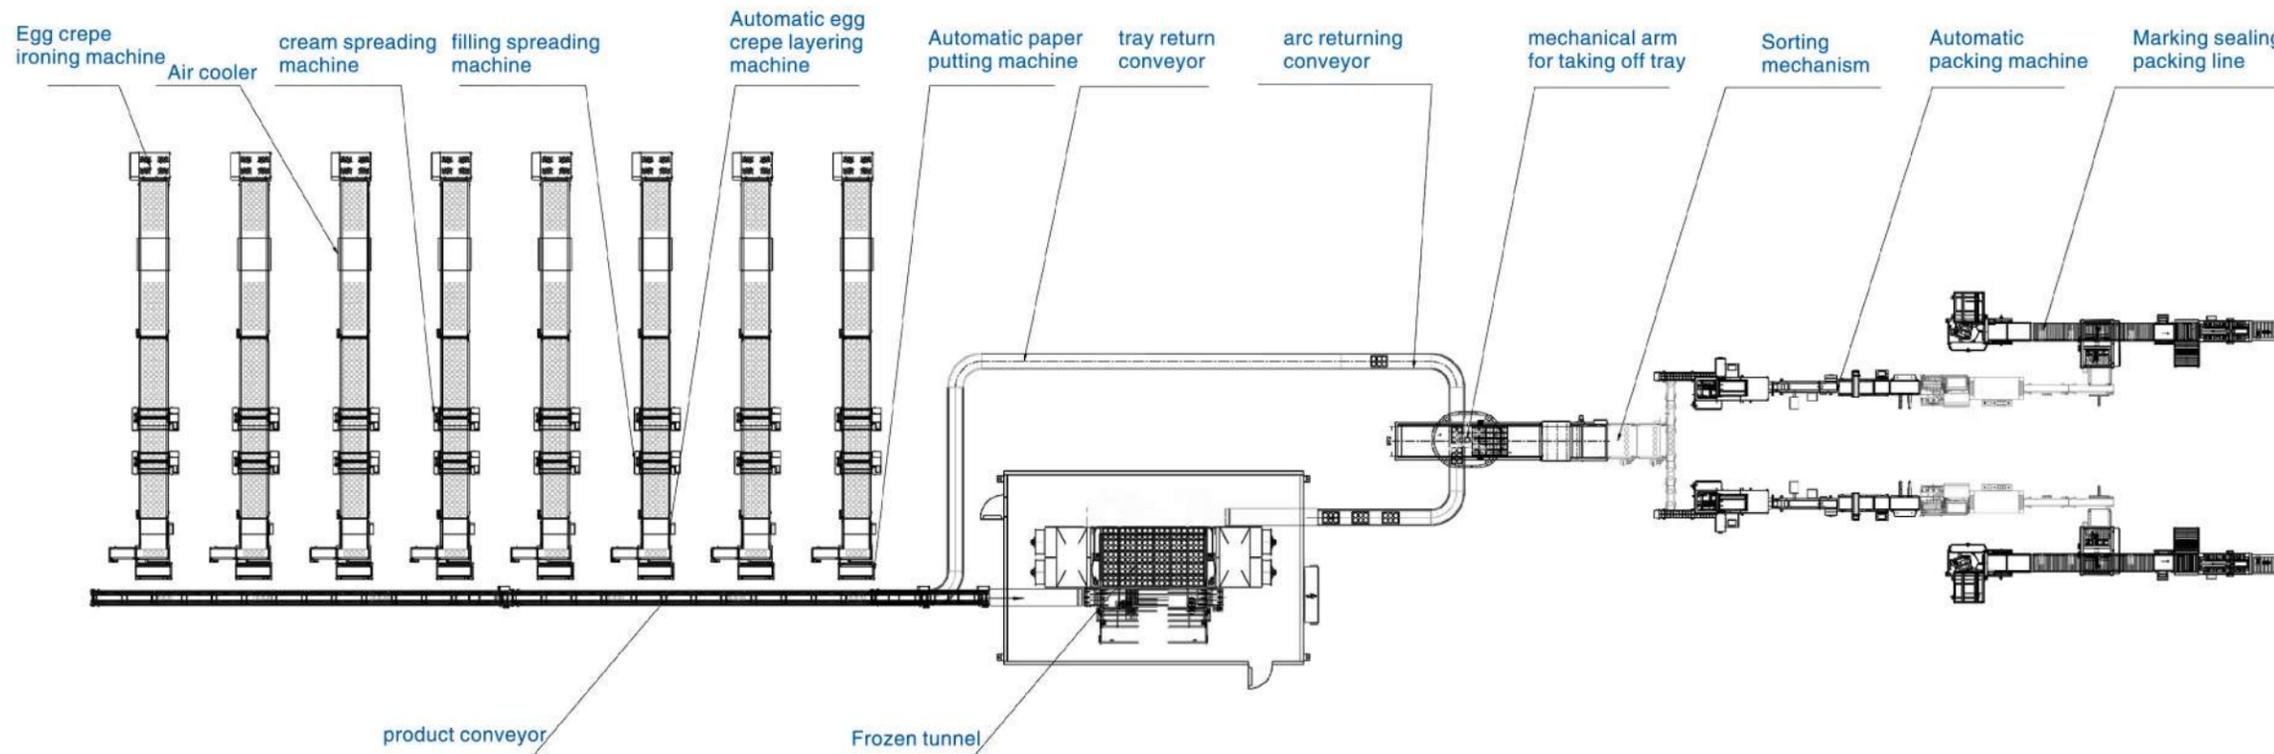



K1 Floor-type Cream depositor




K1B Table-type cream depositor

K1 cream depositor

Performance characteristics

- ★ Can fill cream or other fillings;
- ★ Can fill granular cake slurry and fillings;
- ★ Can be quantitative filling, or quantitative injecting;
- ★ It can be made with single nozzle or double nozzles.

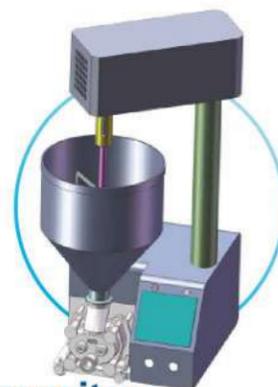

K3 cream depositor


Performance characteristics

- ★ Suitable for all kinds of cake slurry, filling and granule slurry extrusion.
- ★ Can be quantitative control, also can be continuous discharge.
- ★ Can achieve functions for squeezing filling, filling and spreading.
- ★ More than 100 variable nozzles for choice.
- ★ powerful function, high variability, large discharge capacity.
- ★ Auxiliary feeding mechanism can be configured (as shown in the picture on the right)to ensure smooth discharge in the production of thick slurry and light viscosity slurry.

Liquid canning machine

Performance characteristics

- ★ The machine has the advantages of simple structure, convenient operation, it's convenient to clean.
- ★ The machine has the advantages of accurate weight and high efficiency, up to 15000 pcs/hour.
- ★ The machine can be single operation, also can be connected to the production line automatic operation
- ★ Suitable for liquid, fluid, semi-fluid slurry extrusion.

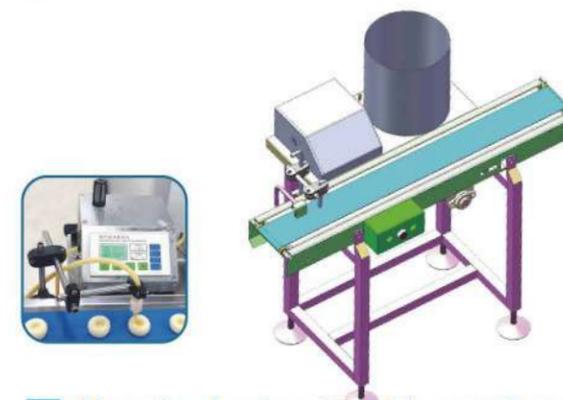

Simple design liquid canning machine

Performance characteristics

- ★ The machine has the advantages of simple structure, convenient operation, no need special hopper, it's convenient to clean.
- ★ the machine has the advantages of accurate weight and high efficiency, up to 60 times per minute.
- ★ The machine can be single operation, also can be connected to the production line for automatic operation;
- ★ Suitable for extrusion of liquid, fluid and semi-fluid slurry.

Material pumping machine

Performance characteristics

- ★ Multi-material adaptability: It can pump liquids, fluids, semi-fluids and cake batter
- ★ Flexible height adjustment: The height of the feeding pipe can be adjusted up and down according to the required height for filling.
- ★ Easy to clean :1.5-3.0mm 304 stainless steel body, easy to clean;
- ★ Very easy to move: With the support of heavy-duty casters, it can be moved easily.
- ★ High collaborative efficiency: It can be combined with filling machines, with convenient linkage operation and significant efficiency improvement.
- ★ Reduced labor costs: Highly automated processes, streamlined labor, and lower costs.



Name	Model	Voltage (V)	Power (KW)	Air pressure (Mpa)	Air consumption	Size (mm)	Weight (KG)	Capacity
Material pumping machine	HYB-BLJ	Single phase/220	1	0.6-0.8	400L/min	900*800*2300	about 200	15KG/min(Take water as an example, it depends on the product)



Bidirectional tracking type side injecting machine HY-501

Performance characteristics

- ★ Applicable to bread, cake, puffs and other products with side injecting requirements
- ★ Connect with tracking operation, can do a dot injecting and strip injecting.
- ★ X-axis Y-axis bidirectional connection tracking, fast speed and high efficiency.
- ★ Can be used to inject a variety of fillings such as fresh cream, jam, and custard.
- ★ Reasonable design, convenient for cleaning and disassembly.



Progressive type side injecting machine HY-502

Performance characteristics

- ★ Applicable to bread, cake, puffs and other products with side filling requirements
- ★ Can do a dot injecting and strip injecting.
- ★ Y-axis connected tracking, fast speed and high efficiency
- ★ Can be used to inject a variety of fillings such as fresh cream, jam, and custard.
- ★ Reasonable design, convenient for cleaning and disassembly.

Continuous type side injecting machine HY-503

Performance characteristics

- ★ Applicable to bread, cake, puffs and other products with side injecting requirements
- ★ Connect with tracking operation, can do a dot injecting and strip injecting.
- ★ Replace man work, reduce labor intensity, fast speed and high efficiency;
- ★ Can be used to inject a variety of fillings such as fresh cream, jam, and custard.
- ★ Reasonable design, convenient for cleaning and disassembly.



Slowly-moving type side injecting machine HY-504

Performance characteristics

- ★ Applicable to bread, cake, puffs and other products with side injecting requirements
- ★ Connect with tracking operation, can do a dot injecting and strip injecting.
- ★ Replace man work, reduce labor intensity, fast speed and high efficiency;
- ★ Can be used to inject a variety of fillings such as fresh cream, jam, and custard.
- ★ Reasonable design, convenient for cleaning and disassembly.
- ★ Auxiliary feeding mechanism can be configured, more suitable to discharge light viscosity filling.


Mochi and puff cover pastry (Made from cookie machine)




Performance characteristics

- ★ It has all the advantages of the cookie machine.
- ★ This machine produces accurate weight product, with high efficiency, can be reached 15,000 pcs/hour;
- ★ The machine can be single operation, also can be connected to the production line for automatic operation;
- ★ Suitable for puff extrusion, also can add a small wire cutting mechanism to cut the pastry automatically cover the puff.


Thousand layer rolling cake production line design

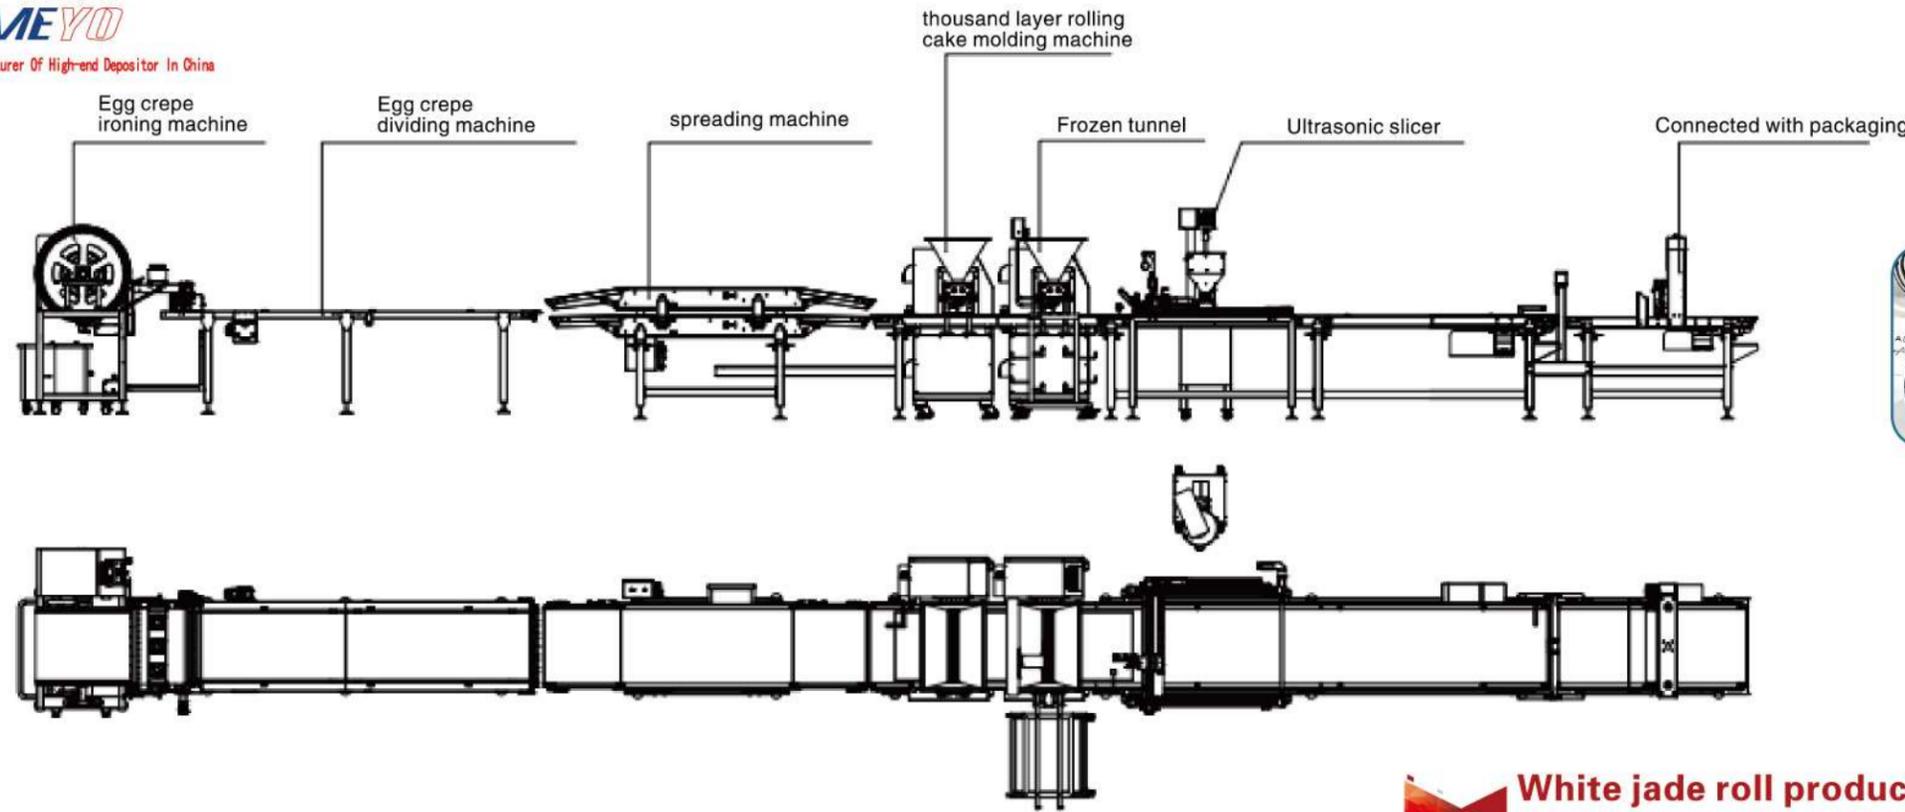

White jade roll production line design

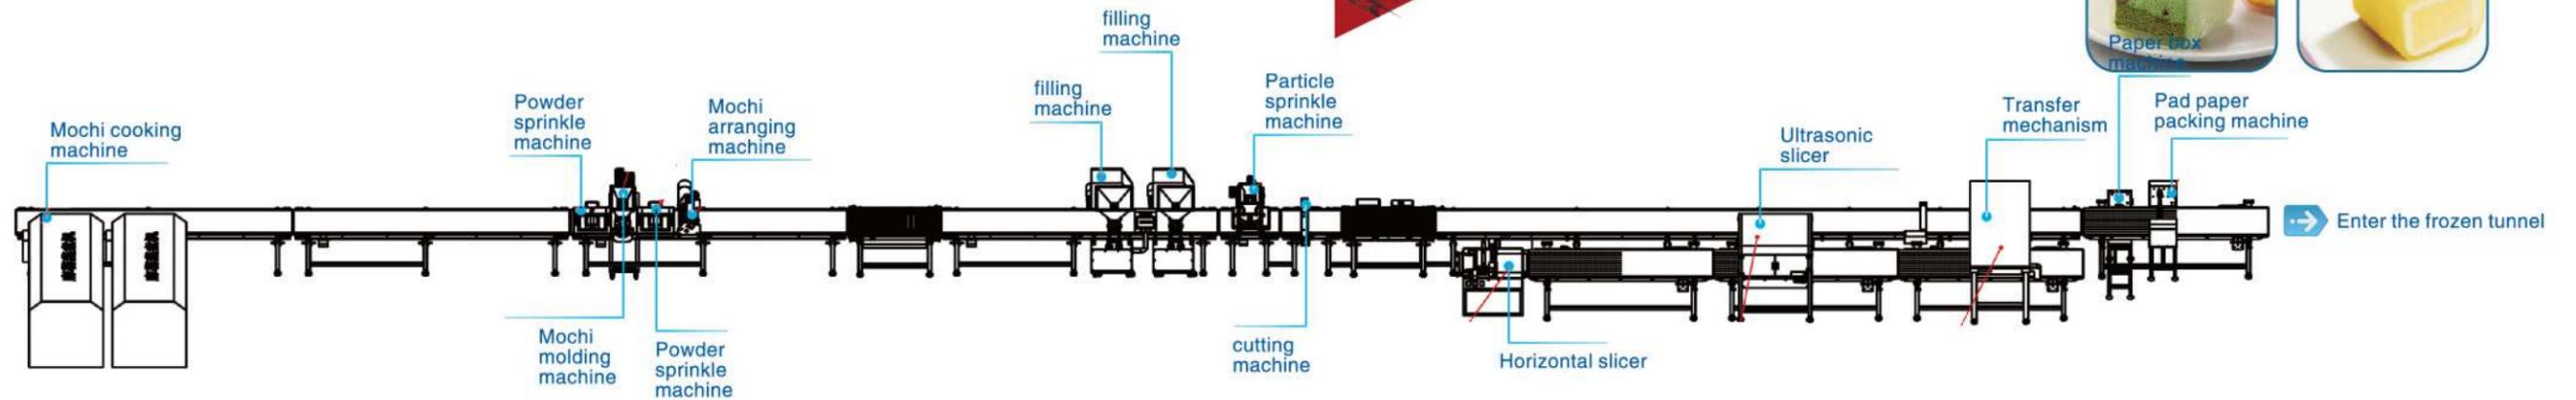

Rolling cake production line design

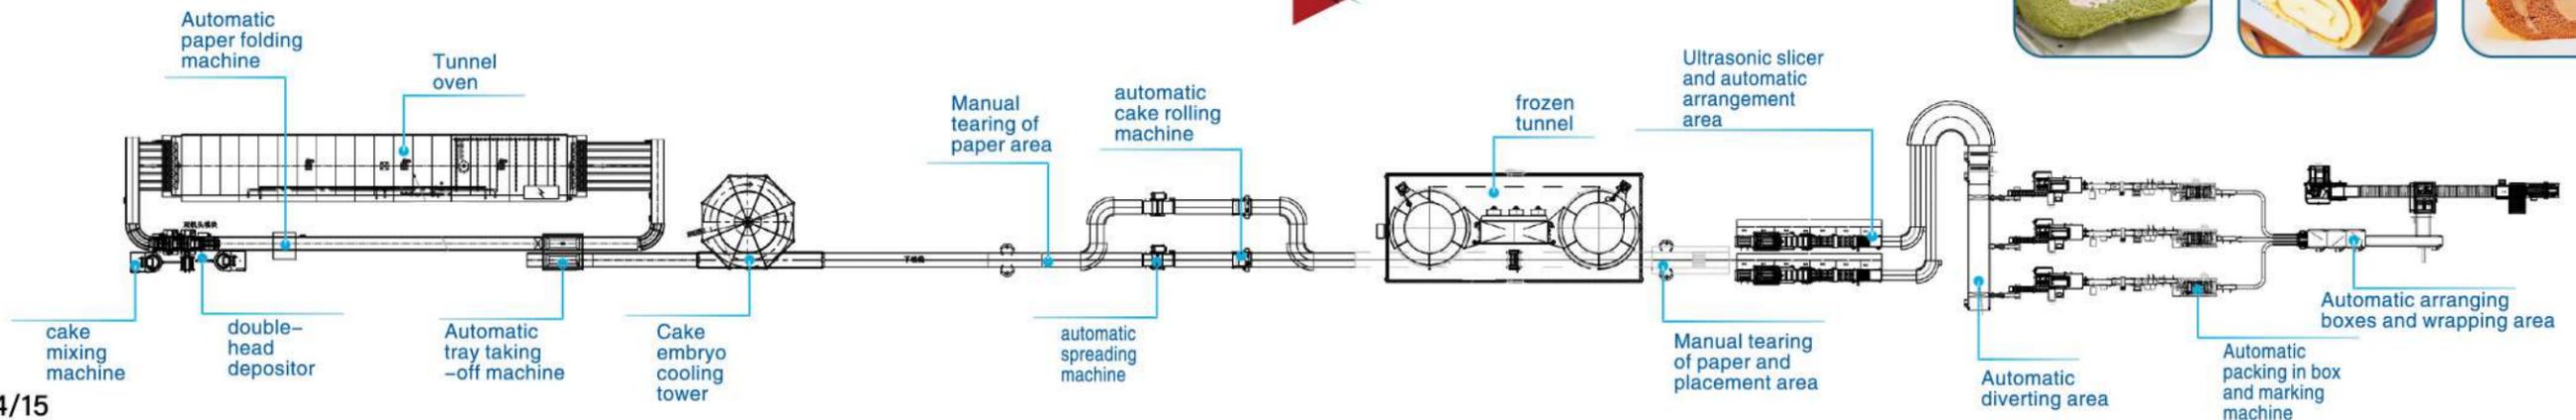

☑ Rainbow mousse cake filling machine HY-307

⚙️ Performance characteristics


- ★ Suitable for multi-color (in 7 colors) product filling.
- ★ The machine adopts 7 independent servos to independently control the discharge of the product, the product weight is accurate, with high efficiency.
- ★ This machine can produce 4 inches, 6 inches, 8 inches, 10 inches rainbow mousse embryos, other size can also be customized.
- ★ The machine has the advantages of simple structure and convenient cleaning.



☑ Cheese cake production line

⚙️ Performance characteristics

- ★ Suitable for embryo base forming and slurry filling of round cheesecake;
- ★ The machine is equipped with turntable, which can be operated by one person, saving manpower.
- ★ The machine is equipped with automatic powder quantification hopper, which can realize the automatic quantification of the cheesecake embryo base, and also can be automatically compacting.
- ★ The machine is equipped with 1 automatic filling machine, which can realize the automatic filling of the slurry, and also can fill while slowly rising to ensure that the product has no pores or holes;
- ★ The machine covers a small area, is a good helper in lean production.

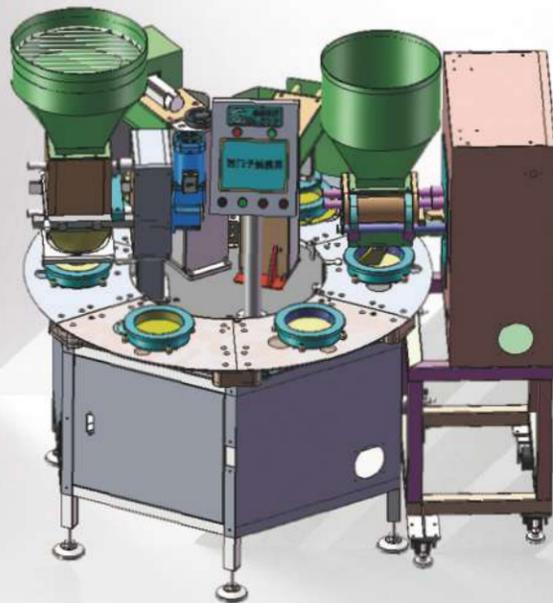

Standard sizes are 6 inches and 8 inches, other size can be customized.



☑ Mousse cake round production line

⚙️ Performance characteristics

- ★ Machine size: 2100*2100*1700mm.
- ★ Capacity: 300-900pcs/Hour, Can be customized on customer's requirement.
- ★ Range: Cake is standard 6 inches, and other sizes can be customized.
- ★ Including: disk conveyor * 1, Deposit biscuit crumbs machine * 1, biscuit crumb stirring machine * 1, cake outer frame * 6, Pressing biscuit crumbs machine * 1, Deposit cheese cream machine * 1, and control system * 1.



☑ Mousse cake circular production line

⚙️ Performance characteristics

- ★ Machine size: length 4750 ± 500mm, width 1100 ± 500mm, height 1630 ± 500mm.
- ★ Capacity: 300-900pcs/Hour, Can be customized on customer's requirement.
- ★ Range: Cake is standard 6 inches, and other sizes can be customized.
- ★ Including: Turn-around chain conveyor * 1, Deposit biscuit crumbs machine * 1, biscuit crumb stirring machine * 1, cake outer frame * 25, Pressing biscuit crumbs machine * 1, Deposit mousse cream machine * 3, surface applicator * 1, sprinkle machine * 1, and control system * 1.





Chocolate filling machine

Performance characteristics


- ★ It's suitable for precision filling of chocolate paste.
- ★ This machine is equipped with jacketed hopper and hot water machine to ensure that the chocolate paste will not crystallize.
- ★ This machine is equipped with automatic stirring mechanism, which can ensure that the surface of the paste will not peel off.
- ★ This machine is suitable for the chocolate filling of a single product less than 1 gram, less than 10 grams and more than 10 grams, with a wide range of products.
- ★ The machine structure is simple, it's convenient to replace discharge nozzle, the touch screen can set several recipes for easy to replace products.
- ★ The machine adopts high precision design, with accurate weight and high efficiency.



Cream decoration machine

Performance characteristics

- ★ The whole machine is stainless steel design, without blind angle in food hygiene
- ★ Suitable for manual/automatic cake decorating, can be point, bracing, squeeze flowers, rotation and other changes
- ★ The machine is equipped with jacket hopper and hot and cold water dispenser to ensure the best temperature for cream using old water dispenser to ensure the best temperature for cream using The machine is equipped with auxiliary feeding mechanism to ensure smooth feeding of cream
- ★ The machine is equipped with 4 groups of servo motors, accurate precision, fast speed

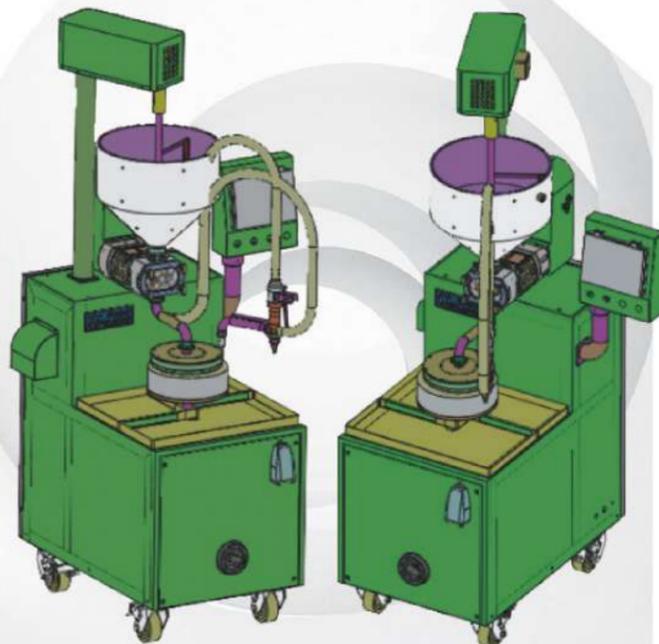

Cake depositor Lifting of material cavity type (cream decoration good helper) HY-102D

Performance characteristics

- ★ Applicable for filling various cupcakes, non-cup cakes, plate cakes and single mold cakes;
- ★ It can be used for a variety of filling dough, heavy oil, sponge, chiffon cake, paste filling, whipped cream;
- ★ Equipped with high quality LCD touch screen, clear and high sensitivity, and has more than 30 sets of storage memory functions;
- ★ The filling roller adopts servo control, the contact between the circular arc gear roller and the material body is gentle and smooth, greatly reducing the degree of batterdeforming;
- ★ It can be fixed point filling and displacementfilling, and can also be equipped with nozzleor unmatched nozzle to select the closingvalve to control the discharge, which canrealize the filling of slurry in various flow tates;
- ★ Up-lifting structure design, can be freelyconnected to the production line, lift patentstructure, greatly superior to peers usingelectric cylinder structure;
- ★ Equipped with servo motor system fordischarging, conveying and lifting, which canbe used for filling thousand-layer cake and various multi-layer cake filling;
- ★ The structure design is simple, quick disassembly and quick replacement, easy cleaning and easy installation;
- ★ The material is optimized, and the conveyor belt adopts anti-deviation structure design, never deviate; The material cavity is hardened by aluminum alloy, strong and durable without scratches; SUS304 inserts parts are installed in the detachable position to be bolted, durable, no worries of screw loose, once the screw loose,it can be replaced with inserts parts;
- ★ Equipped with control discharge and two sets of discharge nozzle.



Coordinate cake depositor(cream decoration good helper) HY-102Z

Performance characteristics

- ★ Applicable to all kinds of cup cakes, sheet cake, single mould cakes, cream decorating etc.;
- ★ LCD touch screen, with 30 sets of memory functions;
- ★ The filling roller adopts special servo control, the round gear can reduce the defoaming condition of cake batter;
- ★ Can do fixed point filling or displacing filling, which can produce various products;
- ★ Can choose the mode of one-man operation or continuous operation to cooperate with production line.
- ★ Feeding,conveying ,rotation& lifting controlled by 5 servos, which can make multi layer product like Thousand Layer Cake and etc.
- ★ Special design ensures that there is no dripping or tailing when filling.
- ★ High waterproof grade and can be washed by flushing.
- ★ Special structure design, anti-deviation durable belt.



"Frozen" turns "fresh", baking industry innovation engine, unlock first class business opportunities





弘裕机械

Representative Manufacturer Of High-end Depositor In China



Standard and customization expert of high-end depositing equipment

GUANGZHOU HAOSHENG HONGYU MACHINERY CO.,LTD

Add: ROOM 22A,2ND FLOOR,NO.3529,3531,HUANGPU EAST ROAD,HUANGPU DISTRICT, GUANGZHOU

GUANGDONG HONGSHENG MACHINERY EQUIPMENT CO.,LTD

Production base : No. 18 Longhu Avenue, Dawang High-tech Zone, Sihui City, Zhaoqing city
Website:www.gzhomeyo.com

Sales contact number

International: 139 0227 8542 North China: 138 0886 8517
East China: 136 2228 3261 Northeast China: 138 0886 8517
South China: 136 2228 9281 Northwest China: 136 2223 6723
West China: 136 0905 0050 Headquarters: 138 0818 5453
Central China: 136 2228 4917 E-commerce: 136 2221 6595

After-sales Hotline 18925179062 13632107640



Wechat public account code



Wechat video account code



Mobile website



Douyin account code